

INSTALL GUIDE FLC-IDS(RS)-BM1-[FLRSBM1]-EN

DOCUMENT NUMBER 22047

REVISION DATE

20150430

FIRMWARE

FLC-IDS(RS)-BM1-[FLRSBM1]

HARDWARE

FLRSBM1

ACCESSORIES

FLPROG (REQUIRED) FLRF1/2/4 (OPTIONAL) CARLINK ASCL2 (OPTIONAL)

FLASHLOGIC) FLRSBM1 FLRS8M1 REMOTE STARTER BMW 2005+

NOTICE The manufacturer will accept no responsability for any electrical damage resulting from improper installation of this product, be that either damage to the vehicle itself or to the installed device. This device must be installed by a certified technician. Please review the Installation Guide carefully before beginning any work.



BEFORE INSTALLATION

- 1- Connect module to computer
- 2- Login to Weblink account
- 3- Flash firmware to module (module is not preloaded with firmware)
- 4- Use accessories accordingly (accessories are sold separately)



VEHICLE LIST - 1 OF 1

PAGE 2 OF 20 DOC.: #22047 • 20150430

	FEATURES																			
	NOTES																			
MAKE	I This firmware covers Automatic Transmission (AT) vehicles only.	YEAR	INSTALL TYPE	3X LOCK START/STANDALONE MOD.	SECURE TAKEOVER**	DATA IMMOBILIZER BYPASS	ARM OEM ALARM	DISARM OEM ALARM	DOOR LOCK	DOOR UNLOCK	NOW I ON FOCK	TRUNK/HATCH RELEASE POWER LIFTGATE	PARKING LIGHT CTRL	RAP SHUTDOWN CTRL	TACHOMETER STATUS MONITORING	BRAKE PEDAL STATUS MONITORING	VSS STATUS MONITORING	GLOW PLUG STATUS MONITORING	TRUNK STATUS MONITORING	HOOD STATUS MONITORING*
_	1 Series PTS AT	08-1		•	•	•	•	•	•			•	•	•	•		•	•		•
	3 Series PTS AT***	06-1		•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
	3 Series Coupe PTS AT***	07-1	13 1	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
	5 Series PTS AT	05-1		•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
	6 Series PTS AT	05-1	10 1	•	•	•	•	•	•			•	•	•	•	•	•		•	•
	1M PTS AT	11	1	•	•	•	•	•	•	• •		•	•	•	•	•	•	•	•	•
	M3 PTS AT***	08-1	12 1	•	•	•	•	•	•		-	•	•	•	•	•	•	•	•	•
	M3 Coupe PTS AT***	08-1	13 1	•	•	•	•	•	•	• •		•	•	•	•	•	•	•	•	•
ВММ	M5 PTS AT	06-1	10 1	•	•	•	•	•	•		١.	•	•	•	•	•	•	•	•	•
Ω	M6 PTS AT	06-1	10 1	•	•	•	•	•	•	• •		•	•	•	•	•	•	•	•	•
	X1 PTS AT***	12-1	15 1	•	•	•	•	•	•			•	•	•	•	•	•		•	•
	X5 PTS AT	07-1	13 1	•	•	•	•	•	•	• •		•	•	•	•	•	•	•	•	•
	X5 Diesel PTS AT	07-1	13 1	•	•	•	•	•	•			•	•	•	•	•	•		•	•
	X5 M PTS AT	10-1	13 1	•	•	•	•	•	•	• •		•	•	•	•	•	•	•	•	•
	X6 PTS AT	08-1	14 1	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
	X6 M PTS AT	10-1	14 1	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
	Z4 PTS AT***		15 1	•	•	•	•	•	•			•	•	•	•	•	•		•	•
	Clubman PTS AT***	08-1	15 1	•	•	•	•	•	•	• •		•	•	•	•	•	•	•	•	•
	Cooper PTS AT***	07-1	15 1	•	•	•	•	•	•			•	•	•	•	•	•		•	•
	Cooper Convertible PTS AT***	08-1		•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
Σ	Countryman / ALL-4 PTS AT	11-1	15 2	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
2	Coupe PTS AT***	12-1	15 1	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
	Paceman PTS AT		15 2	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
	Roadster PTS AT***	12-1	15 1	•	•	•	•	•	•			•	•	•	•	•	•	•	•	•
* If	equipped with a factory hood switch.																			


FLASHLOGIC.

^{*} If equipped with a factory hood switch.

** If equipped with an electric E-brake and it is activated, vehicle will shudown when a door is opened during RS sequence.


*** If equipped with the Confort Access System, the door handles will not be functional during RS sequence.


PAGE 3 OF 20

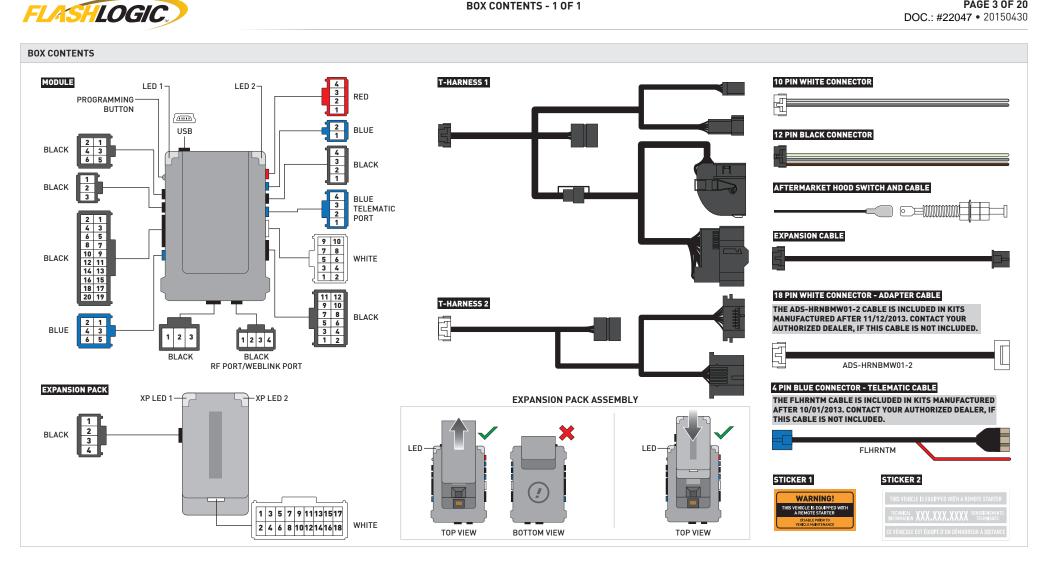





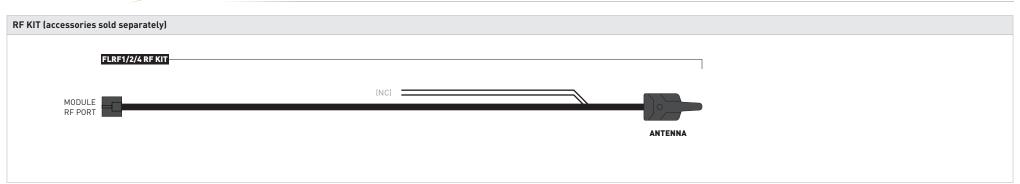

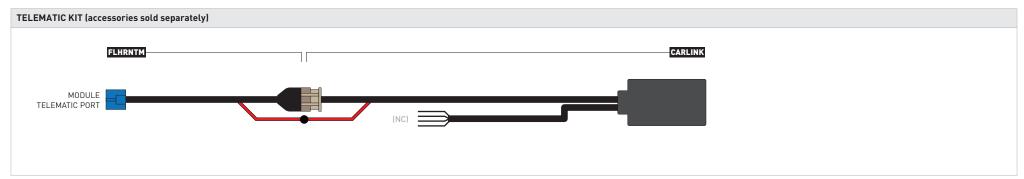

WARNING: The Car Connection Pro telematic kit is NOT compatible with this product.





PAGE 5 OF 20 DOC.: #22047 • 20150430

IMPORTANT	INSTALL VIDEO GALLERY AVAILABLE ONLINE
	 Before installing this product, consult our Install Video Gallery and watch: Vehicle Disassembly Procedure videos Module Connection Procedures videos Module Programming Procedures videos Simply visit our forum and register at http://www.12voltdata.com/forum/viewtopic.php?f=340&t=9683&sid=a61772b486e4584ad6f058b171ffa425



PAGE 6 OF 20 DOC.: #22047 • 20150430





START vehicle. Verify all vehicle functionalities. If the vehicle displays error messages or any malfunction: stop the installation and service the vehicle.



Turn ignition to OFF position. Remove keyfob from keyport.



Verify all keyfob functionalities (Door Lock, Door Unlock, Trunk Release and Comfort Access System if equipped).



Insert the expansion pack into module.



Connect the module to the computer with the WEBLINK cable. Flash the module with the latest firmware then flash the expansion pack.



Connect and secure every connector to the vehicle, as shown in STEP 1 of the WIRING DIAGRAM.

07



WARNING: Any vehicle harness that is disconnected during installation, must be re-connected before performing any system tests. Failure to comply will result in vehicle displaying error messages. An OEM scantool will be required to clear the error messages.

08



START vehicle. Verify all vehicle functionalities.

09



WARNING: If the vehicle displays error messages or any malfunction, stop the installation, verify every connection and if the problem persists, call technical support.

10



Turn ignition to OFF position. Remove keyfob from keyport.



Connect and secure every connector to the module, as shown in STEP 2 of the WIRING DIAGRAM.

12



Connect and secure every connector of the expansion cable to the module, as shown in STEP 3 of the WIRING DIAGRAM.



If required, connect an accessory as shown in the COMPATIBLE ACCESSORIES section of the guide.



If the vehicle is not equipped with a factory hood switch, install an aftermarket hood switch as shown in STEP 4 of the WIRING DIAGRAM.




Put sticker 1 on a clean and visible surface in the engine bay and put sticker 2 under the dashboard near the OBDII connector.



Module installation procedure completed.

PAGE 7 OF 20

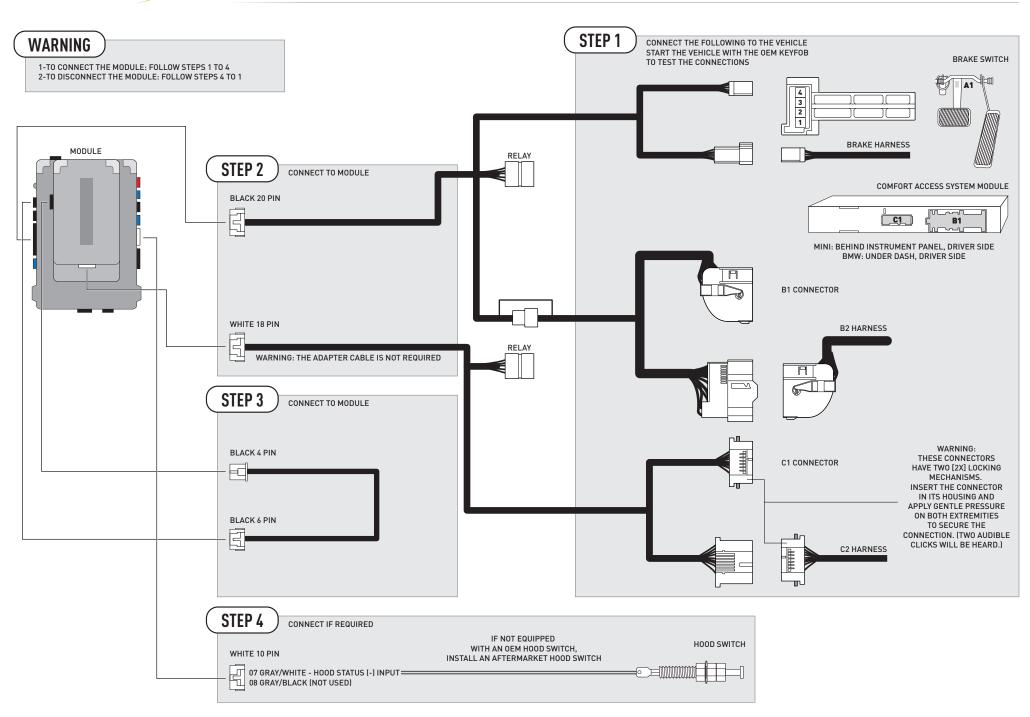




FLASHLOGIC.

PAGE 8 0F 20 DOC.: #22047 • 20150430

MAKE	MODEL	YEAR	WIRE	CONNECTOR NAME	COUNECTOR	CONNECTOR TYPE	POSITION	WIRE COLOR	POLARITY	MODULE	COMPONENT
	Countryman / ALL-4 PTS AT		12V	X14261	~	51 pin	02	Red/Yellow	[+]	Driver kick panel	~
		11-15	Ground	X14261	~	51 pin	47	Brown or Brown/Black	(-)	Driver kick panel	~
		11-13	CanH	X14261	~	51 pin	46	Orange/Green	(DATA)	Driver kick panel	~
Ξ			CanL	X14261	~	51 pin	45	Green	(DATA)	Driver kick panel	~
Σ	Paceman PTS AT		12V	X14261	~	51 pin	02	Red/Yellow	(+)	Driver kick panel	~
		13-15	Ground	X14261	~	51 pin	47	Brown or Brown/Black	(-)	Driver kick panel	~
	i accinanti 13 Ai	13-13	CanH	X14261	~	51 pin	46	Orange/Green	(DATA)	Driver kick panel	~
			CanL	X14261	~	51 pin	45	Green	(DATA)	Driver kick panel	~

PAGE 9 OF 20



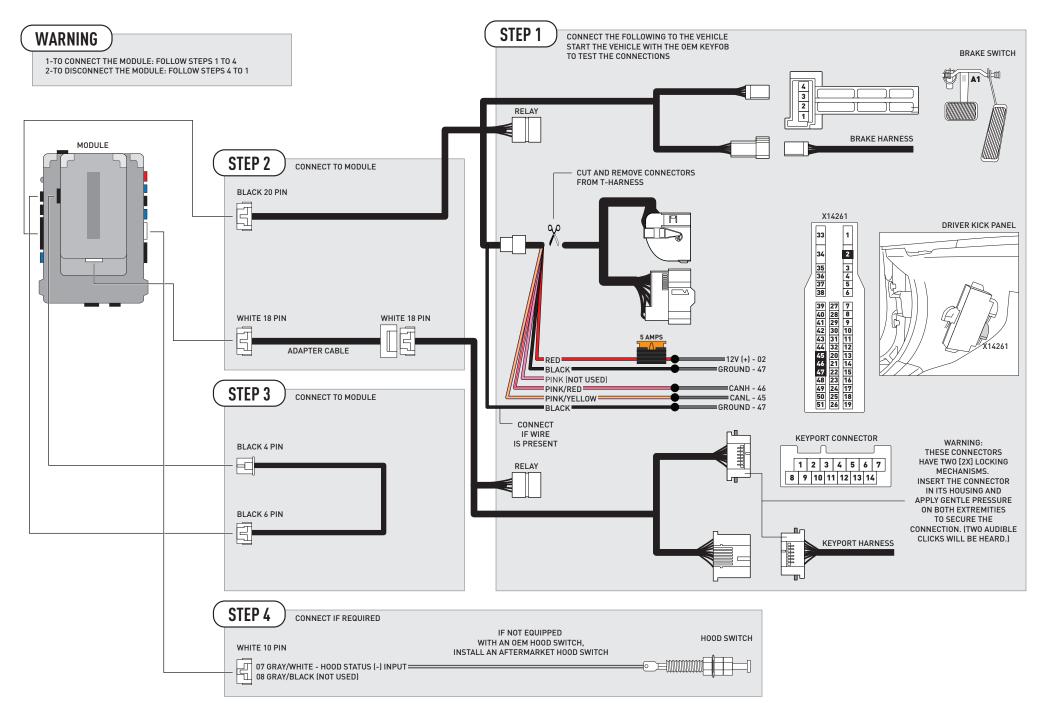



PAGE 10 OF 20 DOC.: #22047 • 20150430





LED 1 is solid RED. Insert keyfob 1 into keyport.





Within 10 seconds, LED 1 will flash GREEN once (1x).

03



Remove keyfob 1 from keyport.



LED 1 will turn solid RED. Wait 5 seconds.

05



Insert keyfob 1 into keyport.



Within 10 seconds, LED 1 will flash GREEN rapidly.

07



Remove keyfob 1 from keyport.

08



WARNING: Follow steps 4, 3, 2 as shown in the wiring diagram to disconnect the module from the vehicle.

09



Connect module to computer and proceed with KLON programming.

10



WARNING: Follow steps 2, 3, 4 as shown in the wiring diagram to connect the module to the vehicle.



LED 1 will turn solid RED.



Insert keyfob 1 into keyport.

13



LED 1 will turn solid GREEN for 2 seconds.



Remove keyfob 1 from keyport.

15



Module Programming Procedure completed.



PAGE 11 OF 20 DOC.: #22047 • 20150430





NOTE: In Valet Mode, the Remote starter is not functional. Keyless entry, Lock and Unlock will remain functional. See RF kit user manual for alternate valet mode programming.





Insert keyfob into keyport.

02



Time restriction. Complete next step within 7 seconds.



Cycle ignition ON five times [5x OFF/ON] rapidly. Parking Light will flash once [1x].



Wait, Parking Light will flash twice [2x], pause for 1.5 second, then will flash once [1x] to indicate that the valet mode is ON or twice [2x] to indicate that the valet mode is OFF.



Turn ignition to STOP position.

06



Remove keyfob from keyport.

07



Valet Mode Programming Procedure completed.

>>



To exit valet mode: repeat steps 1 to 6.



PAGE 12 OF 20 DOC.: #22047 • 20150430





PAGE 13 OF 20 DOC.: #22047 • 20150430

>>



It is mandatory to exit the Module Navigation at the end of this procedure. Failure to exit the Module Navigation will drain vehicle battery. To exit the Module Navigation at any time: Follow STEP 13.



Module must be programmed to the vehicle.



Use the Module Navigation Chart on the next page.



Set ignition to OFF position.



TO ACCESS THE MENUS: Press and hold programming button until LED 1 turns solid GREEN.



IN THE MENUS: Press the programming button as many times as the menu number indicates. LED 1 will flash GREEN an equal amount of times continuously.



TO ACCESS THE OPTIONS: Press and hold programming button until LED 1 turns solid

05



IN THE OPTIONS: Press the programming button as many times as the option number indicates. LED 1 will flash RED an equal amount of times continuously.



TO ACCESS THE SETTINGS: Press and hold programming button until LED 1 turns solid GREEN.

07



LED 1 will flash GREEN as many times as the current (or default) setting number, continuously.

08



IN THE SETTINGS: Press the programming button as many times as necessary to access your setting. LED 1 will flash GREEN an equal amount of times continuously.

09



To return to the MENUS: exit the Module Navigation and redo the Module Navigation Procedure.



To save and return to the OPTIONS: Press and hold programming button until LED 1 turns solid RED.



LED 1 will flash RED as many times as the current option number continuously.



Configure every other setting and proceed to step 13.



MANDATORY: EXIT MODULE NAVIGATION. Press and hold programming button for 7 seconds. LED 1 will flash RED rapidly. Release programming button. LED 1 will turn OFF.



Module navigation completed.

>>



Failure to exit the Module Navigation will drain vehicle battery.

PAGE 14 OF 20 DOC.: #22047 • 20150430



SETTINGS [Y] OPTIONS [X] MENUS **MODULE NAVIGATION CHART: NOTES** [Z]I Default settings are listed in bold. 01 0FF 01 DISARM/UNLOCK BEFORE START II Make sure the option is covered on the vehicle before 02 ON attempting to change the setting. 0FF 01 02 RELOCK AFTER START 02 ON 01 **OFF** 03 **RELOCK AFTER SHUTDOWN** 02 ON 01 OFF 04 FORCE UNLOCK ALL ON FIRST PRESS 02 ON 01 **ENABLE** 05 **TAKEOVER** 02 DISABLE* 01 **45 SEC** 02 90 SEC 06 SECURE TAKEOVER DELAY 03 03 MIN 04 04 MIN 01 DISABLE 02 N/A 07 FACTORY KEYLESS RS SEQUENCE 03 LOCK + UNLOCK + LOCK CONFIGURATION 04 LOCK + LOCK + LOCK 01 03 MIN 02 05 MIN 03 10 MIN 04 **15 MIN** 08 MODULE RUN TIME 25 MIN 05 06 30 MIN 07 35 MIN **15 MIN** 01 02 SEC 02 05 SEC 03 08 SEC 04 10 SEC WAIT TO START DELAY 09 15 SEC 05 06 20 SEC 25 SEC 07 08 30 SEC 10-15 N/A 01 N/A 02-07 Technical Support only 01 N/A 01 N/A

^{*}Vehicle will shutdown when a door is opened.



PAGE 15 0F 20 DOC.: #22047 • 20150430



REMOTE STARTER ERROR CODES: NOTES	[X] NUMBER OF PARKING LIGHT FLASHES	DIAGNOSTIC
I WARNING: The following applies only when the parking	03	Foot brake is ON.
lights are connected and supported by the system.	04	Hood is open.
II After a remote starter failure, the parking lights will flash	05	Engine tach signal is lost.
[X] number times to indicate an error code. See table.	06	System is in Valet Mode.
	07	Vehicle is moving (VSS).
	08	Glow plug timeout error.
	09	RS not synchronized. Start vehicle with 0EM key for 15 sec before trying a new RS sequence.
	10	N/A
	11	N/A
	12	N/A
	13	N/A
	14	N/A
	15	N/A
	16	CAN communication failure during RS sequence.



DOC.: #22047 • 20150430

	TEST MODULE	LED 1 STATUS	DIAGNOSTIC
		Flashing RED	Missing/wrong information from firmware or vehicle.
	DURING PROGRAMMING	Solid RED	Module waiting for more vehicle information.
1		Flashing GREEN	Additional steps required to complete module programming.
		Solid GREEN then OFF	Module correctly programmed.
		OFF	No activity or module already programmed.
		Flashing RED	Module incorrectly programmed.
	DURING REMOTE START	Solid RED	Module incorrectly programmed.
П		Flashing GREEN	Module correctly programmed and operational.
		Solid GREEN then OFF	Reset in progress.
		OFF	Invalid ground when running status from remote starter.
		Flashing RED	Module incorrectly programmed or connected.
		Solid RED	Module not programmed. Waiting for more vehicle information.
Ш	WITH IGNITION OFF	Flashing GREEN	False ground when running status from remote starter.
		Solid GREEN then OFF	Reset in progress.
		OFF	Module at rest and ready for a remote start sequence.

FLASHLOGIC.



PAGE 17 OF 20 DOC.: #22047 • 20150430

01



Disconnect all connectors from module except the BLACK 20-PIN connector.

the BENON 20 T IN connector.

02



Disconnect the BLACK 20-PIN connector.

03



PRESS AND HOLD programming button while connecting the BLACK 20-PIN connector.

04



Wait, LED 1 will flash RED. RELEASE programming button.

05



LED 1 will turn RED for 2 seconds.

06



Module RESET completed.

07



Reconnect all connectors.

08




Repeat programming procedure.

>>



Failure to follow procedure may result with a DTC or a CHECK ENGINE error message.

PAGE 18 OF 20









All vehicle doors must be closed and locked prior to remote start sequence.

N1



Time restriction. Complete steps 2 to 5 within 45 seconds.



Unlock driver door.

03



Open driver door and enter vehicle.

04



Close driver door.

llh.



Press and release BRAKE pedal.

06



Take over procedure completed.

>>



Failure to follow procedure will result in vehicle engine shutdown.

CHECKLIST

FLASHLOGIC.

1	PAGE 19 OF 20 DOC.: #22047 • 20150430
nd call technical support if the problem pe	rsist.
on the OEM keyfob to shut down vehicle ar	nd call technical support.

01	WARNING: Vehicle engine will start many times. Test in a well ventillated area.
02	Open driver door window for easy vehicle access.
03	Close all vehicle doors, hood and trunk.
04	Press LOCK button three times [3x] rapidly on the OEM keyfob to remote start vehicle.
	QUESTION 1: Does the vehicle remote start?
	YES: Go to step 5.
	NO: The module doesn't detect 0EM remote lock button from the vehicle communication network. Check all connection, repeat step 4 and call technical support if the problem persist.
05	Press LOCK button three times [3x] rapidly on the OEM keyfob to shut down vehicle.
	QUESTION 2: Does the vehicle shut down?
	YES: Go to step 6.
	NO: Repeat step 5. If problem persists, push vehicle start button once [1x] to shut down the vehicle and call technical support.
06	Unlock and open driver door.
07	Press LOCK button three times [3x] rapidly on the OEM keyfob to remote start vehicle.
	QUESTION 3: Does the vehicle remote start?
	YES: The module does NOT detect the door signal from the vehicle communication network. Press LOCK button three times [3x] rapidly on the OEM keyfob to shut down vehicle and call technical support.
	NO: Go to step 8.
08	Open hood.
	QUESTION 4: Is the orange warning sticker "Sticker 1" placed under the hood?
	YES: Leave hood open and go to step 9.
	NO: Put the mandatory orange warning sticker "Sticker 1", leave hood open and go to step 9.
09	Close all doors.
10	Press LOCK button three times [3x] rapidly on the OEM keyfob to remote start vehicle.
	QUESTION 5: Does the vehicle remote start?
	YES: Press LOCK button three times [3x] rapidly on the OEM keyfob to shut down vehicle. Go to Question 6.
	NO: Go to step 11.
	QUESTION 6: Is the vehicle equipped with a factory hood switch? (Inside hood latch)
	YES: The module does NOT detect the hood signal from the vehicle communication network. Call technical support.
	NO: Install the mandatory hood switch included in the kit. Repeat installation checklist.
11	Close hood.
12	Enter vehicle. Do NOT press brake pedal.
13	Close all doors.
14	Press LOCK button three times [3x] rapidly on the OEM keyfob to remote start vehicle.
15	Wait for the vehicle to start.
16	Press brake pedal.
	QUESTION 7: Does the vehicle shut down?
	YES: Go to step 17.
	NO: The module does NOT detect the brake pedal signal from the vehicle communication network. Press LOCK button three times [3x] rapidly on the OEM keyfob to shut down vehicle and call technical support.
17	Apply parking brake.
18	Exit vehicle.



PAGE 20 OF 20



	CHECKLIST
19	Close all doors.
20	Press LOCK button three times [3x] rapidly on the OEM keyfob to remote start vehicle.
21	Wait for the vehicle to start.
	QUESTION 8: Is the vehicle equipped with Comfort Access System ?
	YES: For 1, 5, 6, X5, X6: Touch exterior driver door handle to unlock door using Comfort Access System. Within 45 seconds, go to step 22. YES: For 3, X1, Z4, Mini: Press UNLOCK button once [1x] on the OEM keyfob. Within 45 seconds, go to step 22.
	NO: Press UNLOCK button once [1x] on the OEM keyfob. Within 45 seconds, go to step 22.
22	Open driver door.
	QUESTION 9: Does the vehicle shut down?
	YES: For Z4, X5, X6: Go to step 25. YES: For 1, 3, 5, 6, X1: The module does NOT detect the parking brake signal or the unlock signal from the vehicle communication network. Call technical support.
	NO: For Z4, X5, X6: The module does NOT detect the parking brake signal correctly from the vehicle communication network. Call technical support. NO: For 1, 3, 5, 6, X1: Go to step 23.
23	Press and release brake pedal.
24	Push vehicle start button once [1x] to shut down the vehicle.
25	Installation checklist completed.