



OWNER'S GUIDE MUSTANG & KENWOOD RADIO

RETAINS STEERING WHEEL CONTROLS,
SYNC MEDIA PLAYER, SYNC BLUETOOTH AND MORE!



KENWOOD



M U S T A N G

PRODUCTS REQUIRED

- iDatalink Maestro RR Radio Replacement Interface
- MUS1 Dash Kit

OPTIONAL ACCESSORIES

- None

PROGRAMMED FIRMWARE

ADS-RR(SR)-FOR01-DS

NOTICE: Automotive Data Solutions Inc. (ADS) recommends having this installation performed by a certified technician. Logos and trademarks used herein are the properties of their respective owners.

WELCOME

Congratulations on the purchase of your iDatalink Maestro RR Radio replacement solution. You are now a few simple steps away from enjoying your new car radio with enhanced features.

This guide is a great addition to both the vehicle owner's guide and the aftermarket radio owner's guide. We recommend having both these documents handy as they cover all the functionality that the Maestro RR retains.

Please note that all the retained functionalities must be initially available in the vehicle.

NEED HELP?

 **1 866 427-2999**

 support@idatalink.com

 maestro.idatalink.com/support
www.12voltdata.com/forum

USING YOUR STEERING WHEEL CONTROLS

Print Your Quick Reference Card	3
Retaining Sync	3

MUS1 KIT FEATURES

Button Bar	4
USB Ports	4

USING YOUR FACTORY SYSTEMS

Factory Systems	5
Sync Phone	5
Sync Bluetooth	6
Sync Media	6

USING MAESTRO FEATURES

Gauges	7
Vehicle Info	8

CHANGING THE SETTINGS

Vehicle Features	9
Maestro Settings	9
Gauges Settings	10
OBDII Communication	10
Climate Settings	11

USING YOUR STEERING WHEEL CONTROLS *(If equipped)*



Your steering wheel buttons can be used to control your aftermarket Kenwood radio. You can assign steering wheel buttons to Kenwood radio functions. Simply program your Maestro RR module online using the Weblink updater and customize your buttons. Each steering wheel button can control up to two radio features.



PRINT YOUR QUICK REFERENCE CARD

You can print a quick reference card showing your configuration on the Maestro website. If you had your product installed professionally, ask your installer to print this card for you.

maestro STEERING WHEEL CONFIGURATION REFERENCE CARD			maestro STEERING WHEEL CONFIGURATION REFERENCE CARD		
BUTTON	PRESS ONCE	PRESS AND HOLD	BUTTON	PRESS ONCE	PRESS AND HOLD
Volume Up	Volume +	None	Climate	Display Climate Screen	Max A/C On/Off
Volume Down	Volume -	Mute On/Off	Button Bar #2	Fan Speed Down	Temperature Down
Seek Up	Seek +	Band (FM,SAT) & Folder +	Button Bar #3	Display Gauges Screen	Display Vehicle Info Screen
Seek Down	Seek -	Band (AM) & Folder -	Button Bar #4	Fan Speed Up	Temperature Up
Media	Next Source	Previous Source	Rear Defrost	Rear Defrost On/Off	None
Voice	Sync Media Voice Prompt	Sync Phone Voice Prompt	VEHICLE TRIM: 2013 Ford Mustang Base		RADIO: Kenwood DNX691HD
OK	Display Navigation Screen	Display Gauges Screen	http://maestro.idatalink.com		
Phone	Sync Phone Menu or Answer Call	Sync Hang Up or Reject Call			

RETAINING SYNC

When Maestro is programmed to retain Sync, some of the steering wheel buttons will work differently. These two buttons cannot be re-configured. For steering wheel button operation when Sync is retained, see table below.

Steering Wheel Buttons	Press and Release	Press and Hold	References
	Phone menu, answer call	Hang up call	Vehicle Owner's Guide
	Sync voice prompt	Sync phone prompt	Vehicle Owner's Guide

Pressing and releasing the Voice button on the steering wheel controls will change the radio source to the last used Sync source (if you are not already using Sync) and activate the Sync voice prompt. At this point, you can say a command, such as "Line in" or "USB", and Sync will play audio from the connected device. Consult your vehicle manuals for available voice commands.

Pressing and holding the Voice button will activate the Sync Phone voice prompt. You can then say a command, such as "Dial Home". After you are done using the phone, the radio will return to the source you were listening to before you pressed the Voice button.

MUS1 KIT FEATURES



BUTTON BAR


Button functions

There are 5 programmable buttons on the MUS1 dash kit.

The button on the left and on the right of the button bar are hard coded for climate and rear defrost. All 5 buttons can be programmed for 2 functions, a push and release and a push and hold for 2 seconds.

Climate button

Pressing the climate button located on the left of the button bar will switch the radio to the climate screen. From this screen, you can adjust fan speed, temperature, front and rear defroster, and heated seats, if equipped.

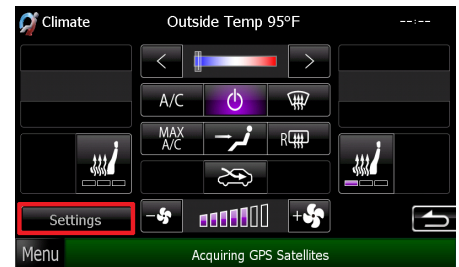

USB PORTS

There are 2 USB ports located in the pocket at the bottom of the MUS1 kit. These USB ports are connected directly to the aftermarket radio and can be accessed on the main screen of the aftermarket radio. If there is only one USB located at the rear of the radio, only one of the USB ports can be used.

USING YOUR FACTORY SYSTEMS

HOW TO GET THERE:



The following section explains how to access and operate the factory systems that have been retained. Your vehicle must already be equipped with these systems.

FACTORY SYSTEMS

The Maestro Rr module retains your factory system functionalities with your new Kenwood radio. In order for them to be functional, these features must be retained during the Maestro Rr online programming with the Weblink Updater. Up to four source buttons will be available in the My Car menu depending on the factory systems in the vehicle.

SYNC PHONE


When installing a Kenwood radio with Bluetooth into a vehicle with Sync, there will be two hands-free systems installed in the vehicle at the same time. Only one hands-free telephone system should be used to make telephone calls. If you choose to use Sync for hands-free calling, OEM Bluetooth needs to be turned ON, in the initial settings in the Kenwood. This setting can also be changed in the source setup menu.

If you choose to use Sync for phone calls, your phone must be paired to the Sync system. A setting in the radio will disable the hands-free telephone portion of the Kenwood Bluetooth system. You may then pair your phone with the Kenwood Bluetooth, but only for audio streaming. Once a phone is paired with both Bluetooth systems, it is possible to use either the Kenwood radio or Sync for Bluetooth streaming, but only Sync can be used for hands-free calls. If you choose to use the Kenwood Bluetooth for phone calls, OEM Bluetooth must be turned OFF and you should delete any pairing with Sync. The Kenwood provided microphone will be used for phone calls.

To pair a phone to the Sync system, enter the Sync Phone source within the My Ford menu. Selecting the settings icon in the Sync Phone menu will allow you to see a list of paired devices, as well as walk you through the process of pairing a new device, connecting a paired phone, or deleting a device. By pressing the "Advanced" button, you can change sync phone settings (ex: ringer and auto answer).

USING YOUR FACTORY SYSTEMS *(Continued)*

HOW TO GET THERE:

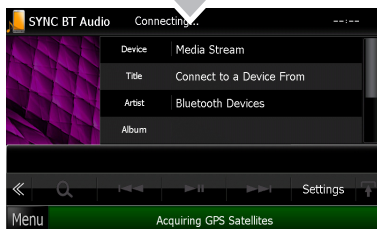

SYNC BLUETOOTH

To stream audio via Bluetooth, enter the Sync Bluetooth source. From here, you can either stream music that is stored on the paired device or audio from another application, such as Pandora.

SYNC MEDIA

The Sync Media source will allow you to use the line in and USB. If you access the Sync Media source by using the radio's touch screen, it will go to whichever connection you used last. You can switch to the other source by using the steering wheel controls. If you need to perform updates to the Microsoft Sync system or change Sync media preferences, they can be accessed through the settings menu in the Sync Media source. For more information about how to operate Sync, consult the documentation that came with your vehicle.

USING MAESTRO FEATURES

HOW TO GET THERE:




Maestro features can be accessed in the My Car submenu. If an icon is not active (grayed out) then it is not available in your vehicle or it was disabled when the Maestro module was programmed using Weblink. The options described here may not be available in your vehicle.

GAUGES

Press on Gauges to view the gauges that are selected. During the installation, the default gauge choices will be displayed. When the Maestro RR module is installed, a list of supported gauges is created. Press on the Settings button to select and configure gauges. In some radios, the gauge selection menu can be quickly accessed by pressing for two seconds the gauge you want to configure.


Gauges that are supported in your vehicle will be displayed in white text and unsupported gauges will be displayed in gray text. If a gauge is grayed out with a number next to it, that gauge is supported and is already assigned to another position on the screen. Some gauges have options that can be set. You will see these appear when you select a gauge that has options. In order to use some of the fuel economy gauges, you will need to enter your fuel tank capacity. This information can usually be found in your vehicle owner's guide.

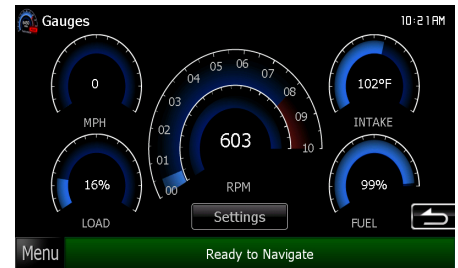

Some radios can display a needle or a bar on each gauge. If your radio supports this feature, a short press on the gauge will toggle between the needle and bar display.


USING MAESTRO FEATURES *(Continued)*

HOW TO GET THERE:

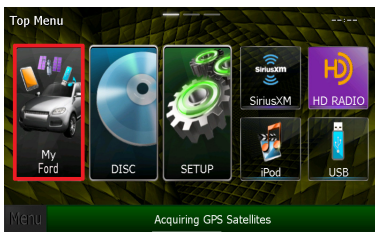

VEHICLE INFO

The Vehicle Info screen displays information about the vehicle such as battery voltage and open entry points. If the Check Engine light is ON in the vehicle, the CHECK ENGINE button will become active. Press this button to see the active trouble codes and attempt to reset them. Press Settings to configure the alerts that can be generated. These alerts will cause the Vehicle Info screen to come up when certain conditions occur.

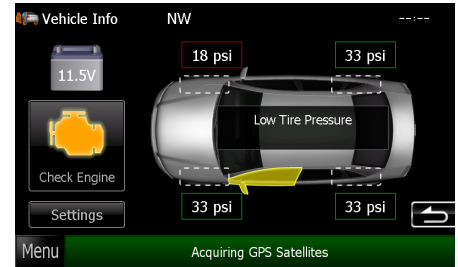



NOTES:

The system will attempt to reset engine trouble codes when you press the Reset button, However, this will not correct a persistent problem.

If the check engine light comes back On after a reset, the vehicle should be serviced by a qualified technician.


CHANGING THE SETTINGS

HOW TO GET THERE:

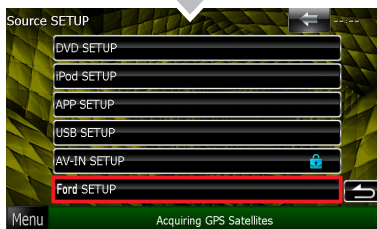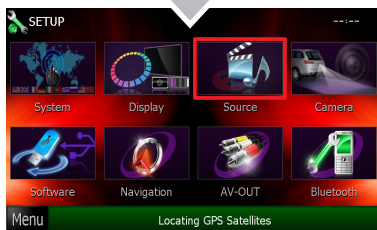

VEHICLE INFO SETTINGS

These settings can be accessed as shown here or by pressing the Settings button on the Vehicle Info screen.

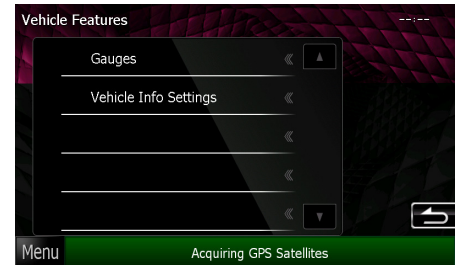

Tire Alert

Enables the vehicle info screen to be displayed automatically when a TPMS fault is detected (only if TPMS is available in the vehicle).

Check Engine Alert

Enables the Vehicle Info screen to be displayed automatically when the check engine light turns ON in the vehicle. The diagnostic codes can be read and cleared.

Door Alert

Enables the Vehicle Info screen to be displayed automatically if a door is opened or left open when the vehicle speed exceeds 5 mph or 8 km/h.


Clear DTCs (Diagnostic Trouble Codes)

This button will only be highlighted if the check engine light in the vehicle is ON. This item will clear the light.

Warning: If the check engine light turns On after using this setting, it may indicate serious problems with the engine. Have the vehicle serviced by a qualified technician.

Amp Settings

Used to adjust the gain of the vehicle's amplifier and set speed compensated volume.

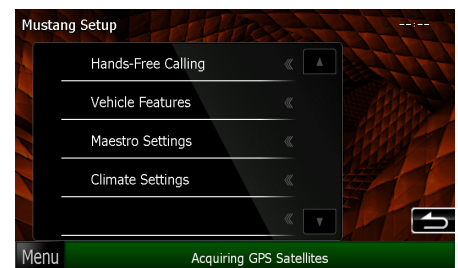

MAESTRO SETTINGS

About Maestro

Displays information about the Maestro module and the firmware it has been programmed with.

Module Audio Gain

Used to adjust the audio gain of the Maestro module. All audio that passes from the factory systems into the Maestro module will be affected by this setting.

Module Master Reset

Used to reset the Maestro module.

CHANGING THE SETTINGS *(Continued)*

HOW TO GET THERE:




GAUGES SETTINGS

These settings can be accessed as shown here or by pressing the Settings button on the Gauges screen.

Select Gauges

Used to assign gauges to the gauges screen. See the Gauges section of this guide for more details.

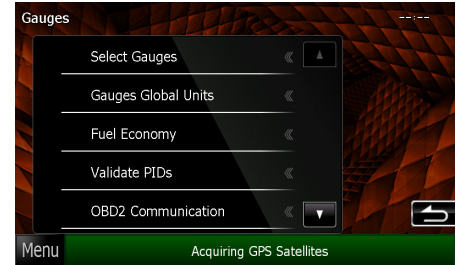

Gauges Global Units

Changes the units of all gauges to Metric or English system. However, the units of each gauge can be set individually in the settings option for that gauge.

Validate PIDs (Parameter Identifiers)

Queries the factory system to determine which gauges can be supported. This is done upon automatically when the module powers up. It is only required to be done manually if the module has been re-flashed.

OBD2 COMMUNICATION

Auto Disable (default)

The module will communicate with the vehicle's OBD2 system unless it detects another device. This may be a scan tool or aftermarket programmer connected to the vehicle.

Always Enabled

The module will communicate with the vehicle's OBD2 system even when a scan tool or aftermarket programmer is connected. However, some scan tools and aftermarket programmers will not function when this option is enabled.

Disabled

The module will not communicate with the vehicle's OBD2 system. This option applies when using a scan tool or aftermarket programmer that does not allow multiple connections at the same time.

Enabled on Demand


The module will only communicate with the vehicle's OBD2 system when the vehicle info or gauges screen is displayed. This is used in vehicles that issue a periodic vehicle health report through a factory system such as Sync or OnStar. However, applying this setting may cause the fuel economy calculations to be inaccurate.

Center Gauge Warning Text

Allows the choice of displaying text when the center gauge reaches its peak.

CHANGING THE SETTINGS *(Continued)*

HOW TO GET THERE:

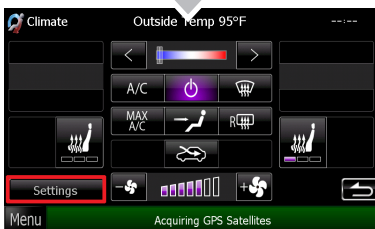


Climate Settings

Climate settings can be accessed as shown here or by pressing Settings button on the Climate screen.

Climate Type

Gives the choice of Manual, Auto, or Dual Zone Auto. the controls should be set to manual, not auto, as auto climate controls are not present in the Mustang.

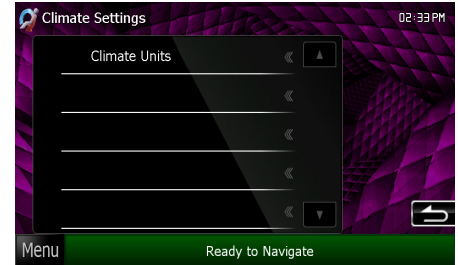

Heated Seats

Turns ON or OFF the option to show and control heated seats from the climate screen.

Cooled Seats

Turns ON or OFF the option to show and control cooled seats from the climate screen. This option should be set to off, as cooled seats are not present in the Mustang.

Auto Display Fan speed down during call

Turns on and off the option to have the climate fan automatically reduce its speed when a Bluetooth phone call is made or received.